

KENWOOD®
HI/FI STEREO COMPONENTS


SERVICE MANUAL

KL-10000Z



SPEAKER SYSTEM

EXTERNAL VIEW / REPAIR / DATA

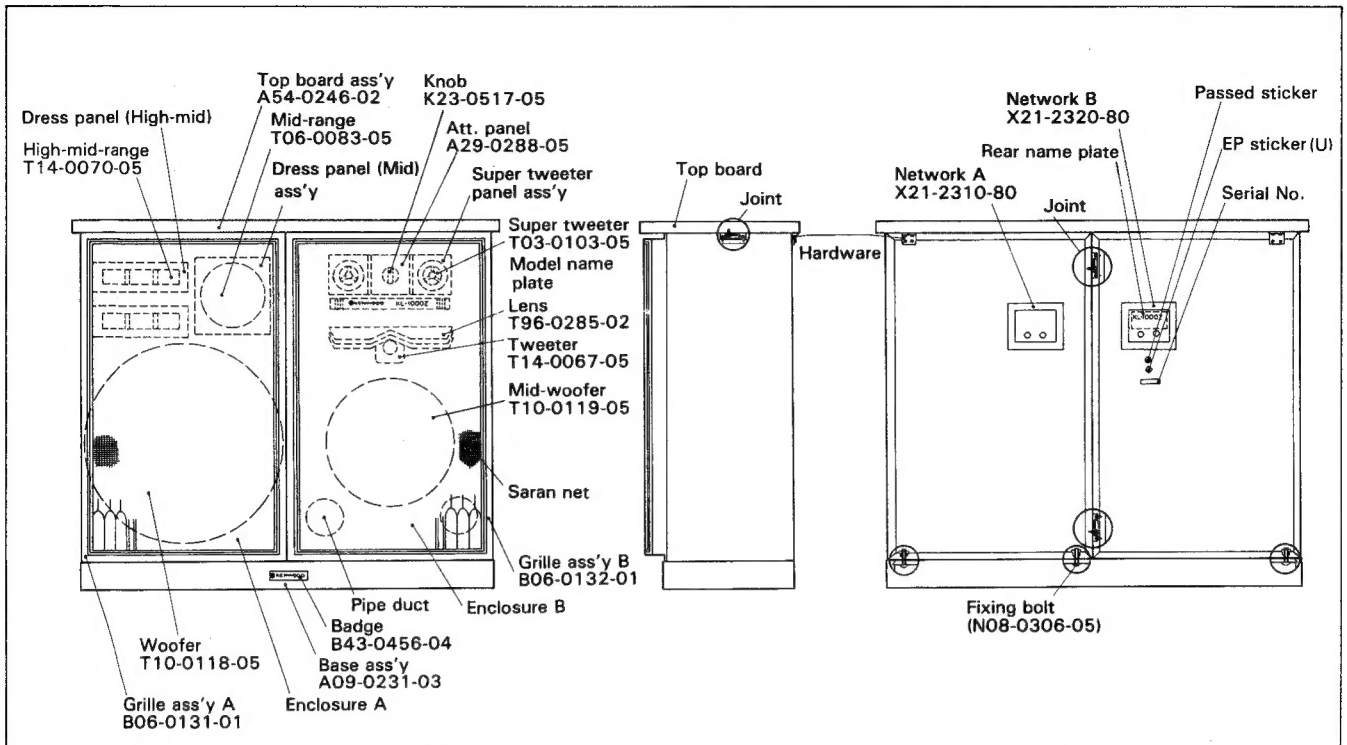

ABSORBER


The sound quality can be changed by the positioning of absorbers. After repair or check, these absorbers must be returned to their original positions.

ATTENUATOR PLATE


The attenuator panel is fixed by the 4 wood screws.

KNOBS

When replacing the knobs, pull it off.

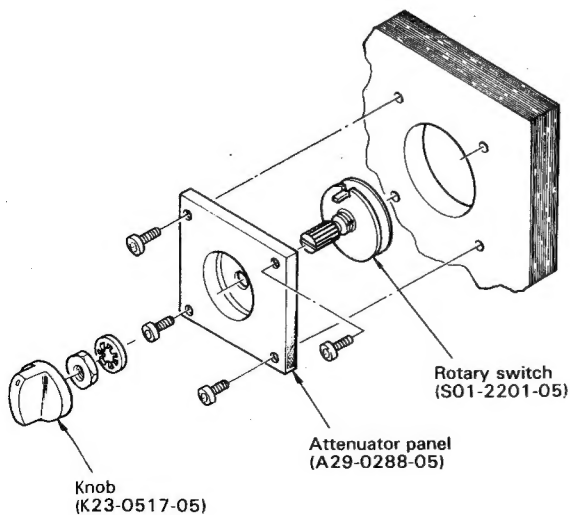


FREQUENCY RESPONSE AND IMPEDANCE CHARACTERISTICS

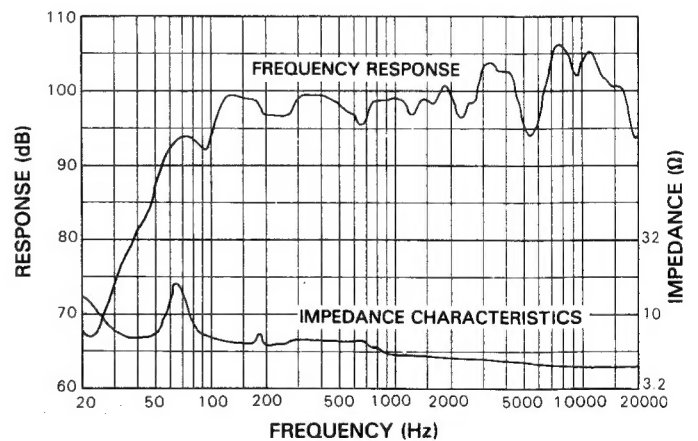


ASSEMBLING ORDER

1. Mounting the speaker boxes


①

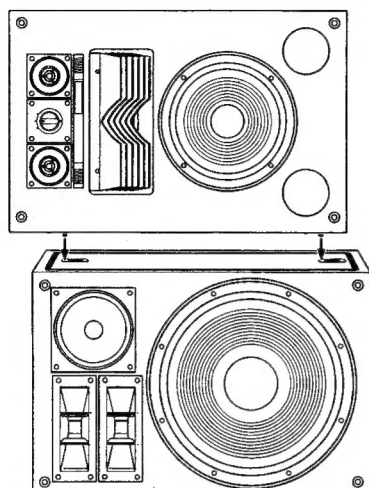

②

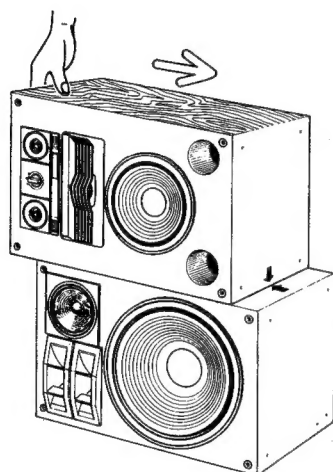


2. Mounting the base

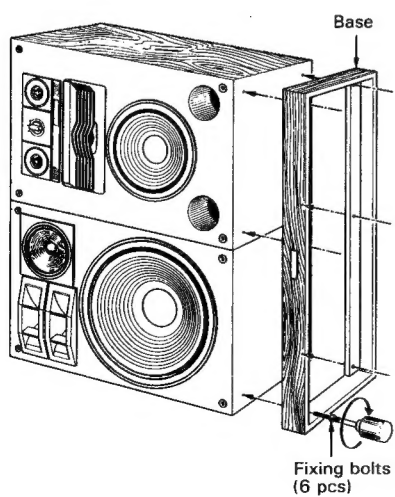


3. Mounting the top board


①

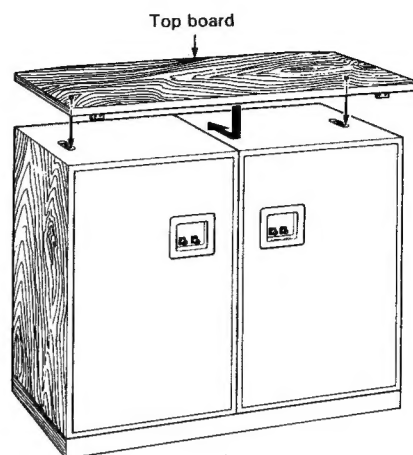

②

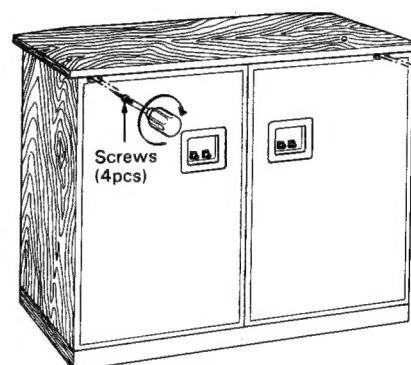

4. Mounting the grilles

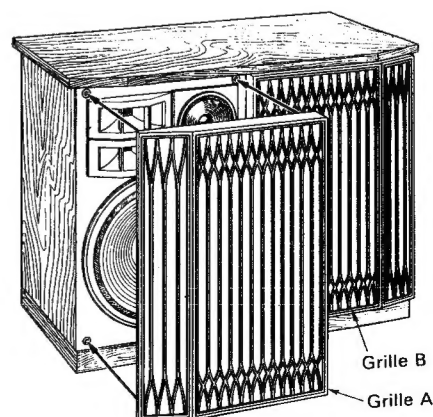


SPEAKERS UNIT SPECIFICATIONS / SCHEMATIC DIAGRAM

SPEAKERS UNIT SPECIFICATIONS


	Woofer	Mid-Woofer	Mid-Range	High Mid-Range	Tweeter	Super Tweeter
Type	Cone	Cone	Cone	Horn	Horn	Cone
Power Bandwidth (Hz)	43Hz ~ 3k	95Hz ~ 5k	550Hz ~ 7k	4k ~ 17k	4k ~ 16k	10k ~ 20k
Sound Pressure Level (1m) dB/W	95.0	95.0	95.5	97.0	99.5	88.0
Impedance	5.2Ω at 150Hz	6Ω at 250Hz	8.3Ω at 900Hz	16Ω at 4kHz	8Ω at 4kHz	13Ω at 10kHz
Magnetic Flux Density (GAUSS)	9700	9300	10400	9000	9000	5500
fo (Hz)	43	—	—	—	—	—

SCHEMATIC DIAGRAM

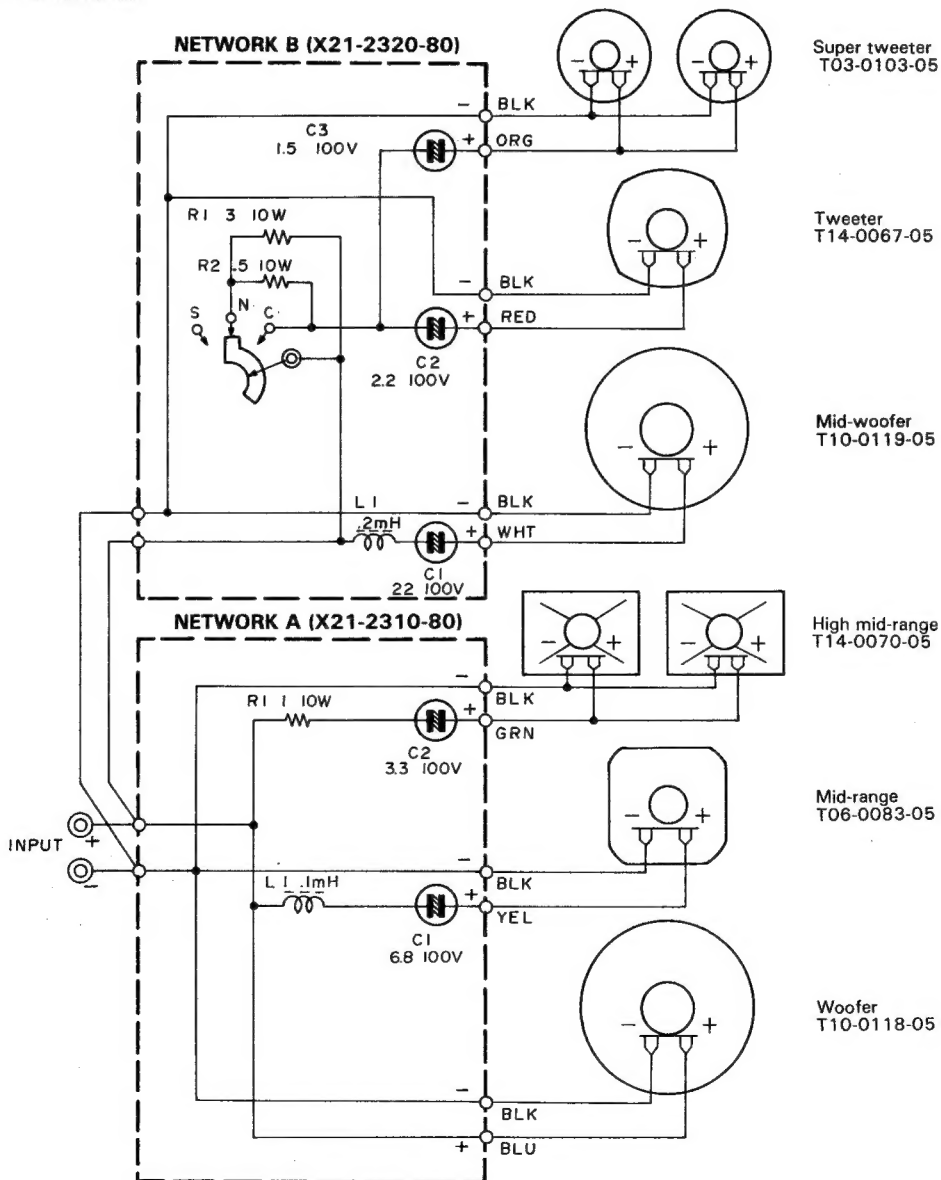


PACKING (1)

UNIT

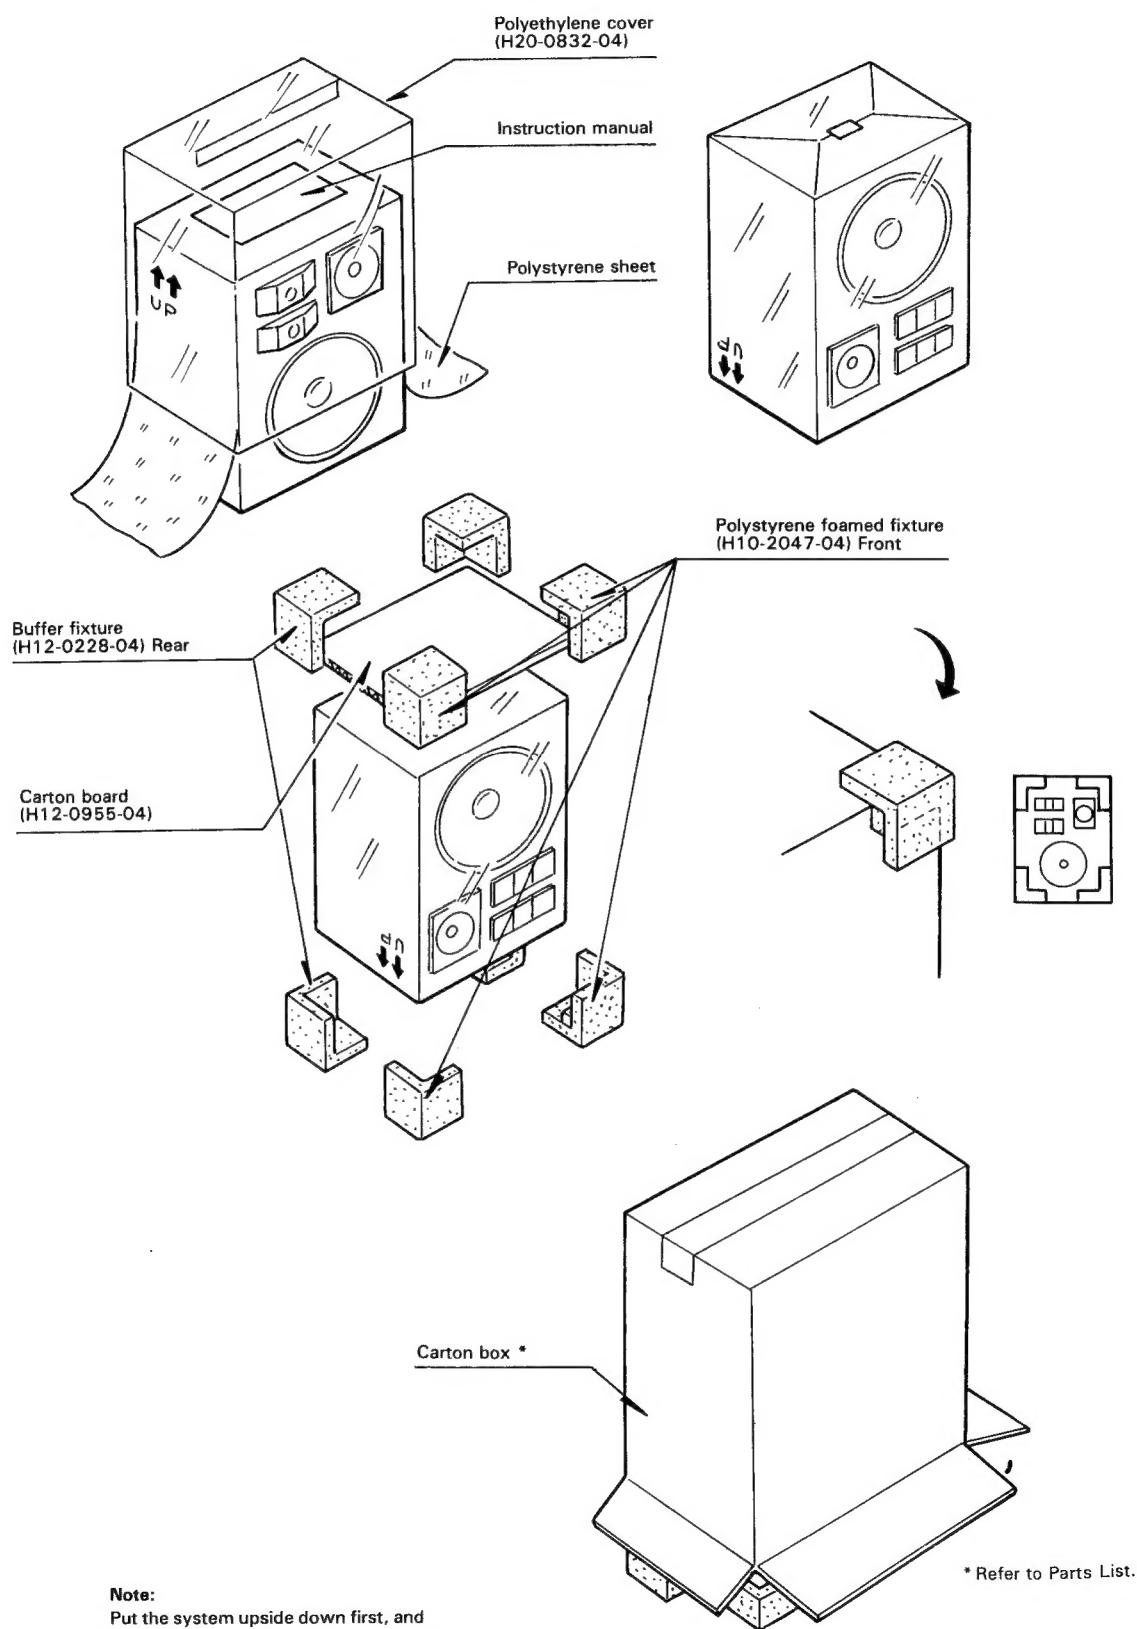

PACKING (2)

GRILLE/BASE

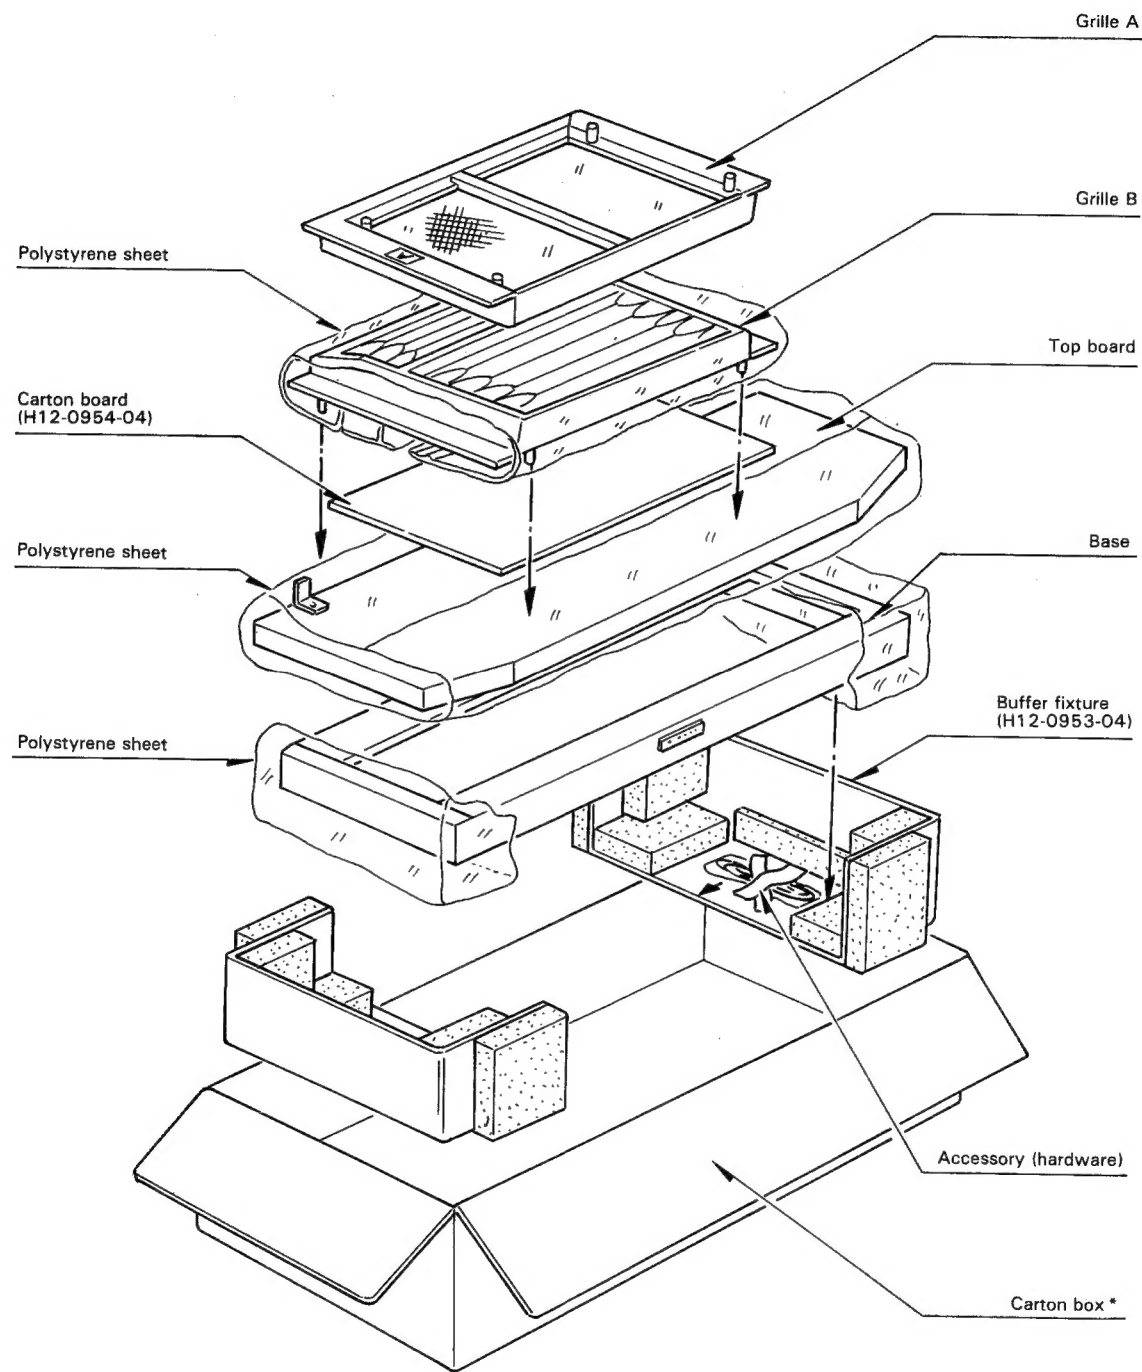

* Refer to Parts list.

PARTS LIST

KL-10000Z (A)

Ref. No.	Parts No.	Description	Re- marks
—	B50-3591-00	Instruction manual U, UE, H, M	☆
—	B50-3593-00	Instruction manual E	☆
—	B50-3594-00	Instruction manual M	☆
—	B50-3600-00	Instruction manual M	☆
—	B46-0062-20	Warranty card U, UE, H	
—	B46-0063-13	Warranty card U	
—	J19-0988-04	Grille holder	
—	H01-3705-04	Carton box U	☆
—	H01-3706-04	Carton box UE	☆
—	H01-3707-04	Carton box H	☆
—	H01-3708-04	Carton box E	☆
—	H01-3709-04	Carton box M	☆
—	H12-0228-04	Buffer fixture	
—	H20-0832-04	Polyethylene cover	
—	T06-0083-05	Mid range	☆
—	T10-0118-05	Woofer	☆
—	T14-0070-05	High mid range	☆
—	X21-2310-80	Network (A)	☆

NETWORK (A) (X21-2310-80)

Ref. No.	Parts No.	Description	Re- marks
C1	C90-0635-05	Non-pole electrolytic 6.8μF 100WV	
C2	C90-0633-05	Non-pole electrolytic 3.3μF 100WV	
—	E29-0292-03	Terminal ass'y	☆
L1	L38-0138-05	Coil (0.1mH)	☆
R1	R44-9701-06	Wire wound 1Ω ± 10% 10W	

NETWORK (B) (X21-2320-80)

Ref. No.	Parts No.	Description	Re- marks
C1	C90-0638-05	Non-pole electrolytic 22μF 100WV	
C2	C90-0631-05	Non-pole electrolytic 2.2μF 100WV	
C3	C90-0608-05	Non-pole electrolytic 1.5μF 100WV	☆
R1	R44-9703-06	Wire wound 3Ω ± 10% 10W	
R2	R44-9705-86	Wire wound 0.5Ω ± 10% 10W	☆
—	E29-0269-05	Terminal	
L1	L38-0133-05	Coil (0.2mH)	
—	S01-2201-05	Rotary switch	

KL-10000Z (B)

Ref. No.	Parts No.	Description	Re- marks
—	A29-0288-05	Attenuator panel	
—	H01-3710-04	Carton box U	☆
—	H01-3711-04	Carton box UE	☆
—	H01-3712-04	Carton box H	☆
—	H01-3713-04	Carton box E	☆
—	H01-3714-04	Carton box M	☆
—	H12-0288-04	Buffer fixture	
—	H20-0832-04	Polyethylene cover	
—	J19-0988-04	Grille holder	
—	K23-0517-05	Knob	
—	T03-0103-05	Super tweeter	☆
—	T10-0119-05	Mid-woofer	☆
—	T14-0067-05	Tweeter	
—	X21-2320-80	Network B	☆

PARTS LIST

Region	Code
U.S.A.	K
Canada	P
PX(Far East)	U
PX(Europe)	UE
Australia	X
South Africa	S
England	T
Europe and Scandinavia	E
Other Areas	M
Audio Club	H

There are no plans for producing units of K, P, X, T, L and S types.

☆ New parts

KL-10000Z (C)

Ref. No.	Parts No.	Description	Re- marks
—	B06-0131-01	Grille ass'y A	☆
—	B06-0132-01	Grille ass'y B	☆
—	E30-1040-05	Speaker cord	☆
—	H01-3715-04	Carton box U	☆
—	H01-3716-04	Carton box UE	☆
—	H01-3717-04	Carton box H	☆
—	H01-3718-04	Carton box E	☆
—	H01-3719-04	Carton box M	☆
—	N99-0607-05	Screw set	☆

KL-10000Z

SPECIFICATIONS

System	6-Way, 8-Speaker System
Mounted Drivers	
Low Frequency Driver ...	406 mm (16") Cone Type × 1
Mid-Bass Range Driver ..	250 mm (10") Cone Type × 1
Mid-Range Driver	160 mm (6-1/2") Cone Type × 1
Mid-High Range Drivers	
Exponential Horn Type with Diffuser × 2	
High Frequency Driver ..	Horn Type with Acoustic Lens × 1
Super High Frequency Drivers	
30 mm (1-1/4") Cone Type × 2	
Enclosure	Bass-Reflex Type
Peak Input Power	400 Watts
Nominal Input Power	200 Watts
Sensitivity	99 dB/W at 1 m
Frequency Response	
16 Hz to 25,000 Hz	
Crossover Frequencies	
700 Hz, 2,000 Hz, 5,000 Hz, 7,000 Hz, 15,000 Hz	
Impedance	8 ohms
Additional Feature	3-Step Acoustic Level Control (Soft-Normal-Clear)
Dimensions	
W 928 mm (36-17/32") H 765 mm (30-1/8") D 348 mm (13-11/16")	
Weight	41.5 kg (91.3 lbs)
Enclosure Finish	Top and Side are in Simulated Walnut-Grain Finish

(Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.)

A product of
TRIO-KENWOOD CORPORATION
6-17, 3-chome. Aobadai, Meguro-ku, Tokyo 153, Japan

KENWOOD ELECTRONICS, INC.

1315 E. Watsoncenter Rd, Carson, California 90745, U.S.A.
75 Seaview Drive, Secaucus, New Jersey 07094, U.S.A.
1098 North Tower Lane, Bensenville, Illinois 60106, U.S.A.

TRIO-KENWOOD ELECTRONICS, N.V.

Leuvensesteenweg 504 B-1930 Zaventem, Belgium

TRIO-KENWOOD ELECTRONICS GmbH

Rodolf-Braas-Str. 20, 6056 Heusenstamm, West Germany

TRIO-KENWOOD FRANCE S.A.

5, Boulevard Ney, 75018 Paris, France

TRIO-KENWOOD SVENSKA AB

Kemistvagen 10A, S-183 21 Taby, Sweden

TRIO-KENWOOD (AUSTRALIA) PTY. LTD.

30 Whiting St., Artarmon, N.S.W. 2064, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Room 501, Wang Kee Building, 5th Floor, 34-37, Connaught Road, Central, Hong Kong